



S Series for Wi-signal



S series is a Smart Signal Sender for businesses and enterprises. It is an IoT product for receiving signals.



LINE Notify

WIPLUX sPDU



1

Hardware



Input: 12-48V_{DC} or 100-240V_{AC}
All channels can use both DC and AC power.
Protector: Fuse 20A, Surge protection

2

Software



central page for monitoring working status, temperature (°C), relative humidity, network connection, ground connection, chassis fan status, etc., and has a Manual Self Test to test the operation.

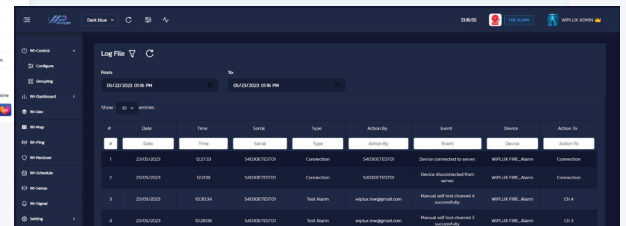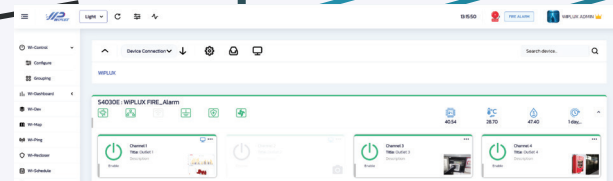

SPLIT GROUP

split group into many signal sender

MERGE GROUP

merge group into one signal sender

ACCESSING S SERIES

accessing S series on Local Area Network, or the Internet

Wi-Map

memorize the installation location

PING IP

pinging IPs to other devices and notify the changed status

SCHEDULE

schedule for tests can be set in seconds

LOG FILES

log files playback for history and past event investigation

FIRMWARE

firmware online update



www.wiplux.com



@wiplux

Follow Us :



WIPLUX



WIPLUX

Intellect Network Web Co., Ltd.
9 Ramkhamhaeng43 Huamak Bangkapi
Bangkok 10240 Thailand
www.wiplux.com
(+66) 081 309 9929, (+66) 02 718 8924